


LONG DISTANCE LINK - USING RS422 FULL DUPLEX OPTO ISOLATED CONVERTERS

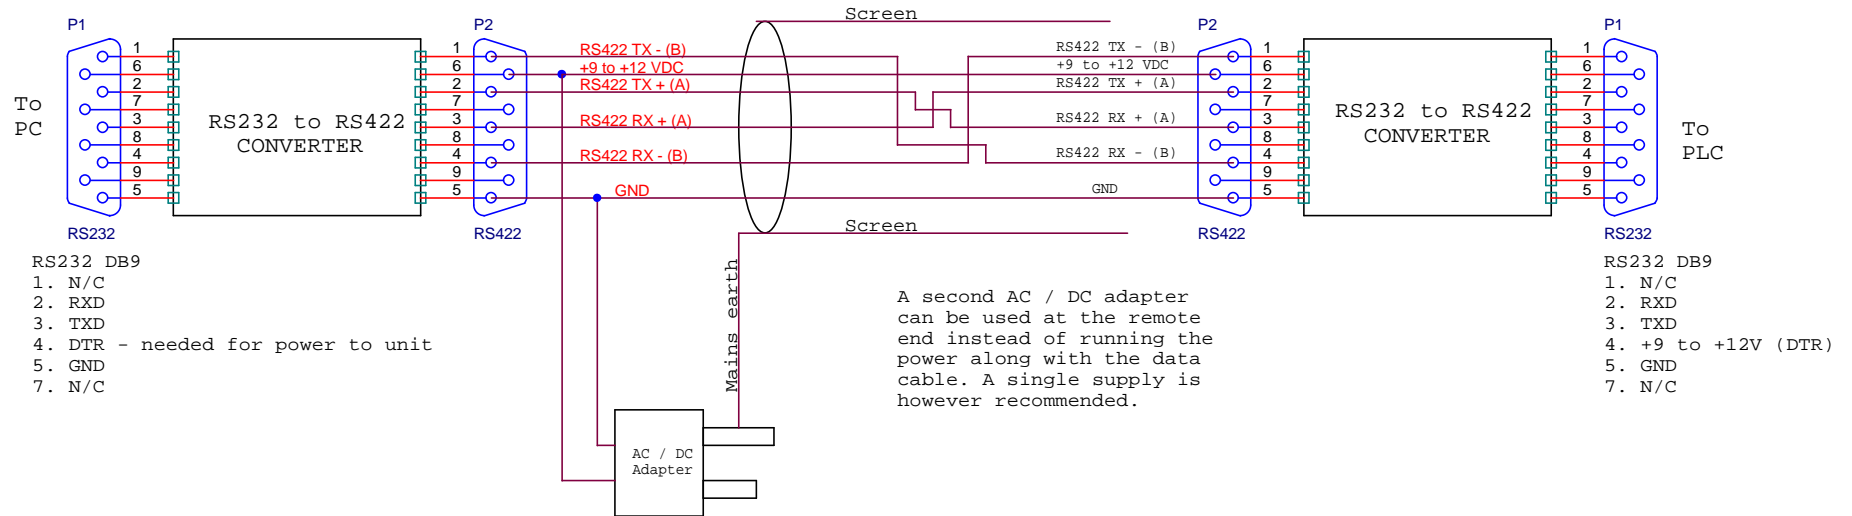

Cable specification

1. 3 pair 24 AWG twisted, screened mylar cable
2. Pair 1: RS422 TX + (A) and TX - (B)
3. Pair 2: RS422 RX + (A) and RX - (B)
4. Pair 3: Use to supply power to the remote unit. (Recommended)
5. Connect screen on one side only to mains earth.

Title		
DESIGNIUM cc 016-371-2238 / 083-654-2929		
Size	Document Number	Rev
A4	Protimp opto-isolated link	0
Date:	Tuesday, May 13, 2008	Sheet 1 of 1